


ECO Lighting Solution

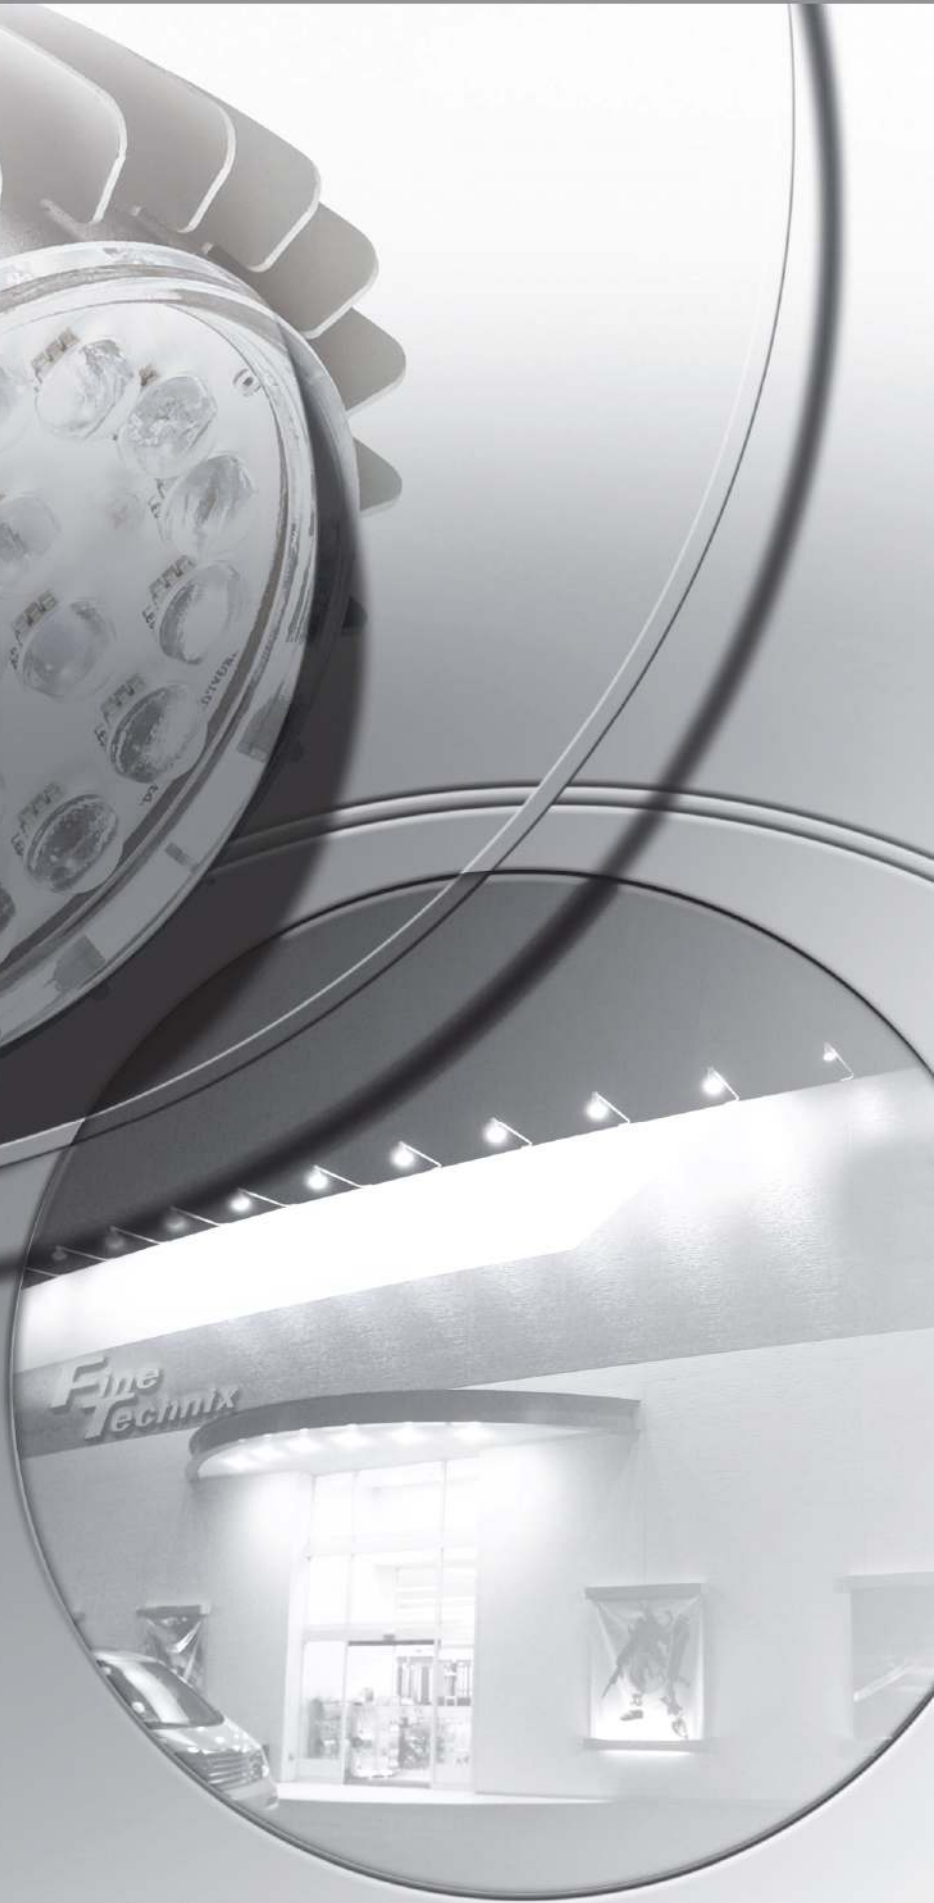

***Fine
Technix***
www.finetechnix.com

LED Tube Light

Picture	Model	SIZE (mm)	Base	Input Voltage (V)	Power Consumption (W)	Luminous Flux (lm)	Illuminance (lux/1m)	Luminaire Efficacy (lm/W)	Color Temperature (K)	Beam Angle (°)	CRI
	FL012AJ	Ø33*580(L)	G13	DC 24 (Adaptor 36W/1.5A)	11.6	780	280	67	5,500	120	70
	FL018AJ	Ø33*1,198(L)			16.8	1,100	380	66			
	FL022A5				21.8	1,400	540	65			
	FL012EJ	Ø33*580(L)	G13	AC 220	12.0	1,000	310	84	5,500	120	70
	FL018EJ	Ø33*1,198(L)			18	1,450	475	81			
	FL024EJ	Ø33*1,198(L)			24	1,950	620	81			
	FL024EK	Ø33*1,500(L)			24	2,000	580	84			




LED Spot Light

Picture	Model	SIZE (mm)	Base	Input Voltage (V)	Power Consumption (W)	Luminous Flux (lm)	Illuminance (lux/1m)	Luminaire Efficacy (lm/W)	Color Temperature (K)	Beam Angle (°)	CRI
	MR003A	Ø50*45.6	GU5.3	DC 12	3	210	190	70	3,000	65	80
	MR005A1	Ø50*45.6	GU5.3	AC, DC 12	4.5	353	1,700	67	5,700	20	75
	MR005A2					233	1,300	51	3,000	38	75
						280	720	67	5,700		80
						233	550	51	3,000		
	PA008U2	Ø97*110.5	E26/E27	AC90~240	8.3	580	1,650	70	5,500	40	73
						400	940	48	3,000		90
	PA015U1	Ø120*139	E26/E27	AC100~240	15	843	6,265	56	3,700	20	75
	PA020U1	Ø116*128(H)	E26/E27	AC90~240	21	1,300	3,780	62	5,500	40	74
						1,000	2,270	48	3,000		90




LED Down Light

Picture	Model	SIZE (mm)	Weight (Kg)	Input Voltage (V)	Power Consumption (W)	Luminous Flux (lm)	Illuminance (lux/1m)	Luminaire Efficacy (lm/W)	Color Temperature (K)	Beam Angle (°)	CRI
	DL50UDH	Ø193*131.6(H)	1.1	AC90~264	50	3,200	1,400	64	5,500	90	75






LED Panel Light

Picture	Model	SIZE (mm)	Weight (Kg)	Input Voltage (V)	Power Consumption (W)	Luminous Flux (lm)	Illuminance (lux/1m)	Luminaire Efficacy (lm/W)	Color Temperature (K)	Beam Angle (°)	CRI
	FS40E(M1/T1)	1.200*299*61	4.7	AC 220	40	2,700	1,500	68	5,500	90	75
	FS49E(M1/T1)				49	3,300	1,250	68			
	FS60E(M1/T1)				60	3,900	1,500	65			
	FS40EM2	1.300*313*68	6.0	AC 220	40	2,700	1,100	68	5,500	90	75
	FS49EM2				49	3,100	1,700	64			
	FS60EM2				60	3,900	1,500	65			
	FS40E (T4/M4/M5/M6)	600*600*29(H)	6.0	AC 220	40	2,700	1,500	68	5,500	70	75
	FS49E (T4/M4/M5/M6)				49	3,300	1,250	68			
	FS60E (T4/M4/M5/M6)				60	4,100	2,200	68			
	WP19UA2	1.239*109*66(H)	2.8	AC90~264	19	1,200	400	63	5,300 ~ 6,000K	120	75
	WP38UA2				38	2,500	1,300	66			

LED Down Light

Picture	Model	SIZE (mm)	Base	Input Voltage (V)	Power Consumption (W)	Luminous Flux (lm)	Illuminance (lux/1m)	Luminaire Efficacy (lm/W)	Color Temperature (K)	Beam Angle (°)	CRI
 NEW	IL008UJ	∅71*123(H)	E26/E27	AC 90~264	8	450	150	56	5,500	120	70
 NEW	DL008UM	∅90*146(H)	E26/E27	AC 90~264	8.3	455	175	55	5,500	120	75
	DL012UM					377	140	46	3,000		72
					DL012UM	12	640	240	54		5,500
 NEW	DL016UM	∅109*149(H)	E26/E27	AC 90~264		16	890	350	56	5,500	120
					DL022UM		845	330	53	3,000	
	DL022UM					22	1,125	465	51	5,500	
					966		350	44	3,000	72	



LED High Power Light

Picture	Model	SIZE (mm)	Base	Input Voltage (V)	Power Consumption (W)	Luminous Flux (lm)	Illuminance (lux/1m)	Luminaire Efficacy (lm/W)	Color Temperature (K)	Beam Angle (°)	CRI
	IL045UJ	Ø204*201.3(H)	E39/E40	AC 90~264	45	3,200	930	71	5,700	120	70
	IL075U	Ø270*260(H)	E39/E40	AC 90~264	75	5,100	4,150	68	5,200	120	70
	IL060U1	Ø241*260(H)	E39/E40	AC 100~277	58	3,800	1,440	66	5,500	100	75
	IL100U1	Ø241*260(H)	E39/E40	AC 90~277	95	6,300	6,900	66	5,700	50	75
	DL150U1	Ø374*298(H)	-	AC 90~240	150	11,700	9,700	78	5,700	70	80
	DL200U1				200	15,000	-	75			75




LED Flood Light

Picture	Model	SIZE (mm)	Weight (Kg)	Input Voltage (V)	Power Consumption (W)	Luminous Flux (lm)	Illuminance (lux/1m)	Luminaire Efficacy (lm/W)	Color Temperature (K)	Beam Angle (°)	CRI
	XL270U2	434*567*129(H)	9.5	AC 90~264	270	18,080	2,965 /10m	67	5,000 ~ 7,000	11	75
	XL270U3					18,080	218 /10m			48	

LED Desk Lamp


Picture	Model	SIZE (mm)	Weight (Kg)	Input Voltage (V)	Power Consumption (W)	Luminous Flux (lm)	Illuminance (lux/1m)	Luminaire Efficacy (lm/W)	Color Temperature (K)	Beam Angle (°)	CRI
	FV10	Ø200*412*383(H)	1.5	DC12V/1.5A	9	-	300 ~ 1400	-	-	-	-
	FV7	Ø200*412*383(H)	1.2	DC12V/1.5A	5	-	120 ~ 1400	-	-	-	-

LED Street Light

Picture	Model	SIZE (mm)	Weight (Kg)	Input Voltage (V)	Power Consumption (W)	Luminous Flux (lm)	Illuminance (lux/1m)	Luminaire Efficacy (lm/W)	Color Temperature (K)	Beam Angle (°)	CRI
	ST080U1	596*294*143	7.5	AC 90~240	80	5,100	17/8m	64	5,700	V:120 H:80	70
	ST100U2	708*342*160(H)	7.0	AC 90~240	102	6,700	56/8m	66	5,000	140	70
	ST150U2				142	9,150	81/8m	65			
	ST120U1	394*785*185(H)	11.3	AC 90~264	120	9,000	31/8m	75	5,700	V:120 H:80	70
	ST150U3				150	11,250	33/8m				

Sales Reference

www.finetechnix.com

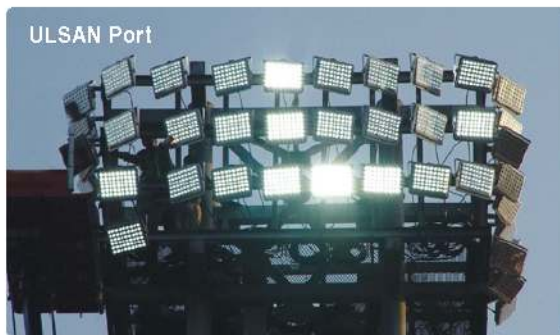



FineTechnix Co.,Ltd.

203-3, Anyang 7-dong, Manan-gu, Anyang-si, Gyeonggi-do, Korea 430-817

TEL: +82-31-468-0100 FAX: +82-31-468-0101

E-mail: sales@vegalux.co.kr / janet_kim@finetechnix.com